

MANUFACTURING FACILITIES

TODO

Gardner Denver Ltd
Channel Road
Westwood Industrial Estate
Margate
Kent
CT9 4JR
Phone +44 1843 222850 • Fax +44 1843 295444

SALES OFFICE

TODO

Gardner Denver Ltd
Channel Road
Westwood Industrial Estate
Margate
Kent
CT9 4JR
Phone +44 1843 222850 • Fax +44 1843 295444

TODO

Skovdevagen 8,
SE-545 31
Toreboda
Sweden
Phone +46 (0)506 19940 • Fax +46 (0)506 19944

Emco Wheaton France

Emco Wheaton Division
Immeuble le Miroir
15-17 Bld du Général De Gaulle
92542 Montrouge Cedex
France
Phone + 33 1 46 12 41 41 • Fax + 33 1 46 12 41 61

Emco Wheaton GmbH

Blue Danube Park,
Objekt 60,
2100 Korneuburg,
Austria
Phone +43 2262 64281-0 • Fax +43 2262 6428120

Emco Wheaton GmbH

Presnenskaya emb. 10
Block C – Embankment Tower – of. 526
123317 Moscow
Russia
Phone +7 495 9677612 • Fax +7 495 9677600


Emco Wheaton Asia Pacific

21-5F IOI Business Park, Bandar Puchong Jaya,
Puchong, 47170,
Selangor, Malaysia
Phone +603 8075 7500
Fax +603 8075 4100
Email cwhu@emcowheaton.com

Gardner Denver International Ltd

PO Box 30804
Diraz, Manama
Bahrain
Phone + 973 17813187 • Fax +973 17813186

TODO® PTC - SAFETY PRESSURE TIGHT CAP

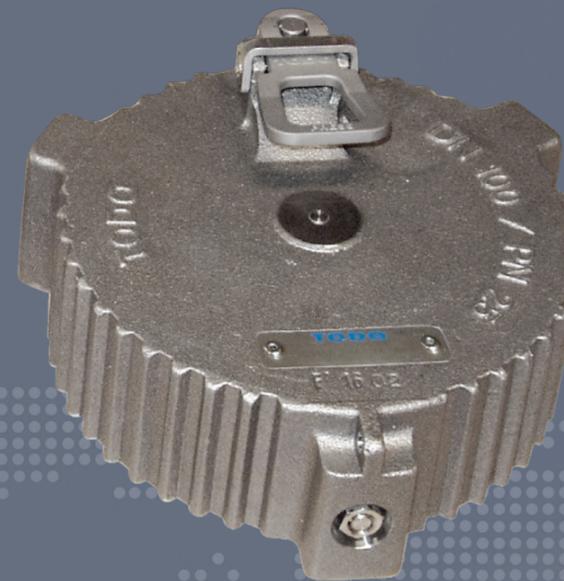

TODO®
A Gardner Denver Product

www.todo.se

assist@todo.se

www.emcowheaton.com

assist@emcowheaton.com



TODO 29.08.13


TODO® PTC - SAFETY PRESSURE TIGHT CAP

The TODO® PTC is specifically designed to enhance operator safety and containment security in chemical and gas transport.

Designed in close collaboration with leading chemical and gas companies, the PTC offers safety and operational benefits beyond those offered by existing closure technologies.

Should the possibility of an upstream closure leakage occur, the PTC provides identification of a system pressure and will hold this pressure until the problem can be safely resolve

Should the operator still choose to remove the cap it will reduce the static pressure to zero thus preventing the forceful expulsion of the transfer media.

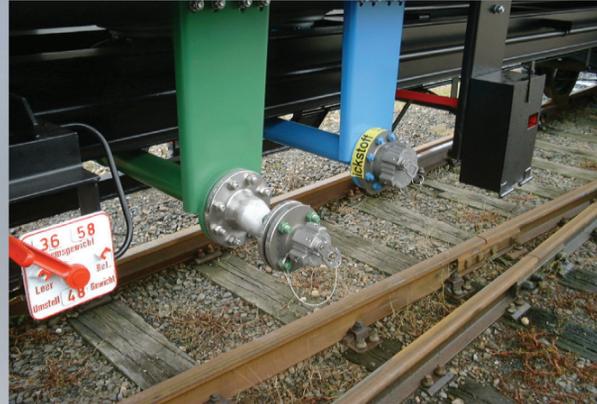

Approved as third closure for category II product.

Features

- **Pressure indicator.**
This feature alerts the operator to the presence of a pressure above 1.0 bar behind the cap and possible failure of upstream closure.
- **Automatic depressurization.**
Reduces any static pressure upstream of the cap upon operation. Any other sealing cap or flange may allow removal under pressure with potentially serious consequences for the operator. Removes the possibility of disconnecting the cap whilst under pressure.
- **Customs / tamper seal feature.**
The cap operating mechanism will accept all commonly used wire and plastic custom seals.
- **Automatic locking.**
The PTC locks automatically in either direction but requires a deliberate action to disconnect.
- **Certified closure.**
The PTC is certified as a full second or third closure depending on the application. The cap can be used to replace other closure methods such as valves.
- **Manually lockable.**
The PTC can be manually locked using a padlock.

Certificates / Approvals

- VdTÜV type approval, mark TÜ.AGG.162-93 towards ADR, RID, IMDG and VDI-rules 2440, part 3.3.1.3.
- CE-marked, European directives 97/23/EC (PED) and 94/9/EC (ATEX) compliant.
- TDT approval, mark TDT-UW-30/09 towards ADR/RID in Poland.
- Manufactured under EN ISO 9001:2000
- Certified towards ISO 14001:2004 and OHSAS 18001:2007
- Manufactured towards EN 13480 and EN 13445.

Technical Details

Sizes:	2" (DN 50), 3" (DN 80) and 4" (DN 100).
Materials:	316L stainless steel.
Seals:	FKM (Viton®), EPDM, Nitrile, various Perfluorelastomers.
Thread seals:	Al & GM = PUR (Polyurethane), SS = PTFE (Teflon®).
Working pressure:	PN 25
Test pressure:	PN 37.5
Compatibility:	Tank unit caps according to NATO STANAG 3756.

Viton® is registered trademarks of DuPont Performance Elastomers.

Safety Pressure Tight Cap Size Range



2" (DN 50) PTC

3" (DN 80) PTC

4" (DN 100) PTC

Applications



Approved as second closure on the top of tanks.